

# PEGASUS 400°

DIECI PEGASUS TELEHANDLER 3.8 - 4 T / 15.7 - 18 M



38.16



40.18

**DIECI**  
TELEHANDLERS

## PERFORMANCE

Machine model	PEGASUS 38.16	PEGASUS 40.18
Maximum capacity	3800 kg (8378 lb)	4000 kg (8818 lb)
Maximum lifting height on stabilizers	15.70 m (51.5 ft)	18.00 m (59.1 ft)
Maximum horizontal extension on stabilizers	13.50 m (44.3 ft)	15.30 m (50.2 ft)
Fork swiveling angle	133°	133°
Pull-out force	5700 daN (12814 lbf)	5700 daN (12814 lbf)
Towing force	7300 daN (16411 lbf)	7300 daN (16411 lbf)
Maximum climb angle	40%	40%
Unladen weight	13200 kg (29101 lb)	13700 kg (30203 lb)
Max speed (referred to wheels with maximum permitted diameter)	25 km/h (15.5 mph)	25 km/h (15.5 mph)

## BOOM

Machine model	PEGASUS 38.16	PEGASUS 40.18
Lifting	17.4 s	20.6 s
Getting off the basket	12.6 s	14.2 s
Extension	34.2 s	26.0 s
Retraction	21.9 s	17.0 s
Forward swiveling	3.9 s	3.8 s
Reverse swiveling	2.4 s	2.0 s

## ENGINE

Machine model	PEGASUS 38.16	PEGASUS 40.18
Brand	Kubota	Kubota
Nominal power	73.4 kW (98 HP)	73.4 kW (98 HP)
@rpm	2600 rpm	2600 rpm
Operation	4-stroke	4-stroke
Injection	Mechanical	Mechanical
Number and arrangement of cylinders	4, Vertical inline	4, Vertical inline
Displacement	3769 cm <sup>3</sup> (230 in <sup>3</sup> )	3769 cm <sup>3</sup> (230 in <sup>3</sup> )
Consumption	231 g/kWh (380 lb/Hp h)	231 g/kWh (380 lb/Hp h)
@rpm	2600 rpm	2600 rpm
Emission standards	Stage IIIA/Tier 3	Stage IIIA/Tier 3
Cooling system	Liquid	Liquid
Intake	Turbo compressor	Turbo compressor

## DIFFERENTIAL AXLES

Machine model	PEGASUS 38.16	PEGASUS 40.18
Axles types	2 steering, with 4 planetary reduction gears	2 steering, with 4 planetary reduction gears
Type of steering	4 wheels / transversal / 2 wheels	4 wheels / transversal / 2 wheels
Front axle	Rigid	Rigid
Rear axle	Swinging	Swinging
Service brake	Oil bath with servo brake on front and rear axle with double hydraulic system	Oil bath with servo brake on front and rear axle with double hydraulic system
Park brake	Automatic spring applied hydraulic release	Automatic spring applied hydraulic release

## HYDRAULIC SYSTEM

Machine model	PEGASUS 38.16	PEGASUS 40.18
Hydraulic pump type	Double gear pump with "Energy Saving" system	Double gear pump with "Energy Saving" system
Hydraulic pump capacity	135 L/min (35.7 gal/min)	135 L/min (35.7 gal/min)
Max. operating pressure	20.3 MPa (3336 psi)	20.3 MPa (3336 psi)
Distributor control	Proportional 5in1 Joystick	Proportional 5in1 Joystick
Distributor type	Hydraulic in 5 sections with "Load Sensing" proportional electronic servo-control with "Flow Sharing", 5 simultaneous movements	Hydraulic in 5 sections with "Load Sensing" proportional electronic servo-control with "Flow Sharing", 5 simultaneous movements

## REFUELING

Machine model	PEGASUS 38.16	PEGASUS 40.18
Hydraulic motor (total)	270.0 L (71.33 gal)	270.0 L (71.33 gal)
Diesel tank	180.0 L (47.55 gal)	180.0 L (47.55 gal)

## TRANSMISSION




Machine model	PEGASUS 38.16	PEGASUS 40.18
Transmission type	Hydrostatic with variable flow pump	Hydrostatic with variable flow pump
Hydraulic motor	Hydrostatic with continuous automatic adjustment	Hydrostatic with continuous automatic adjustment
Reversal	Electro-Hydraulic	Electro-Hydraulic
Inching	With inching pedal for controlled forward movement	With inching pedal for controlled forward movement
Transmission gearbox	Servocontrolled 2-speed	Servocontrolled 2-speed





## TYRES

Machine model	PEGASUS 38.16	PEGASUS 40.18
Standard tyres	400/70R20	400/70R20

## DIMENSIONS

Machine model	PEGASUS 38.16	PEGASUS 40.18
A	310 mm (12.2 in)	310 mm (12.2 in)
B	2430 mm (95.7 in)	2280 mm (89.8 in)
C	2950 mm (116.1 in)	2950 mm (116.1 in)
D	1175 mm (46.3 in)	1175 mm (46.3 in)
E	1490 mm (58.7 in)	1330 mm (52.4 in)
F	4880 mm (192.1 in)	4880 mm (192.1 in)
G	6740 mm (192.1 in)	6630 mm (261 in)
H	3035 mm (119.5 in)	3035 mm (119.5 in)
I	980 mm (38.6 in)	980 mm (38.6 in)
L	1920 mm (75.6 in)	1920 mm (75.6 in)
M	2380 mm (93.7 in)	2380 mm (93.7 in)
N	3968 mm (156.2 in)	3968 mm (156.2 in)
O	5163 mm (203.3 in)	5163 mm (203.3 in)
P	1700 mm (66.9 in)	1700 mm (66.9 in)
Q	4430 mm (174.4 in)	4430 mm (174.4 in)
R	4750 mm (187 in)	4750 mm (187 in)
S	2420 mm (95.3 in)	2420 mm (95.3 in)
T	200 mm (7.9 in)	140 mm (5.5 in)

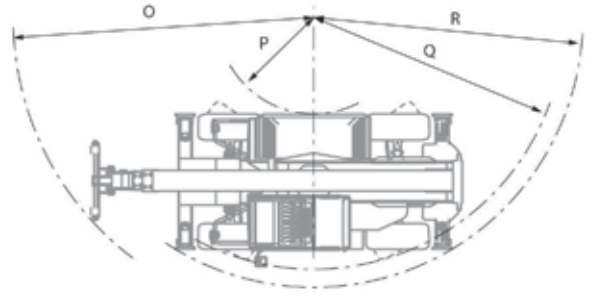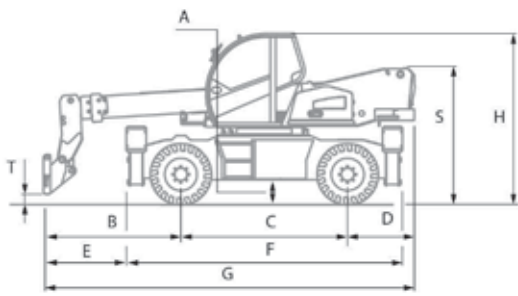

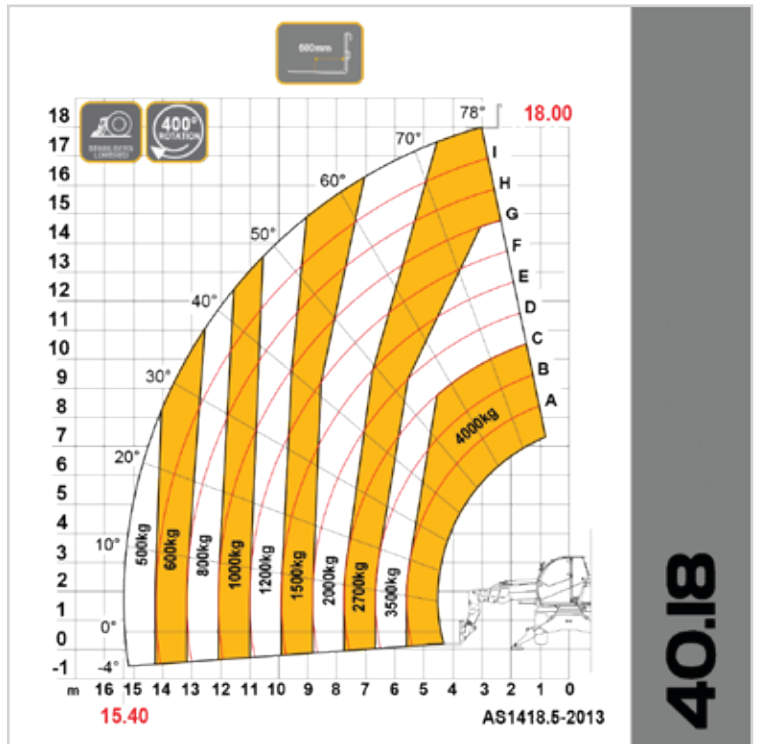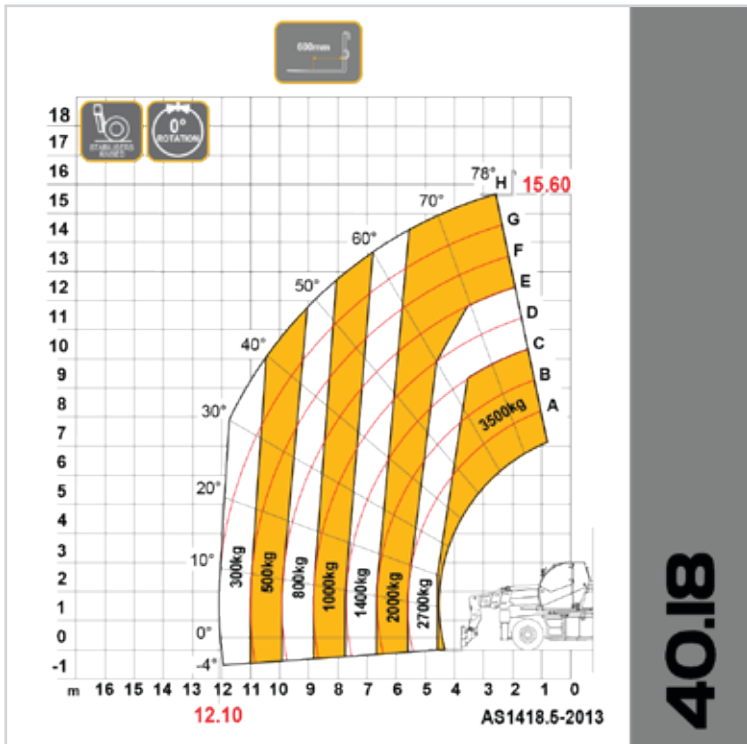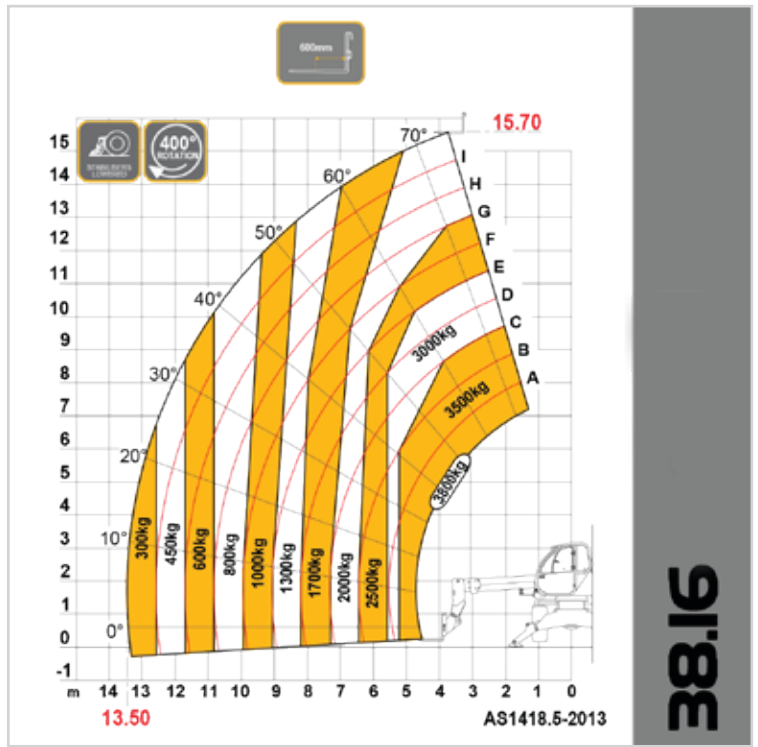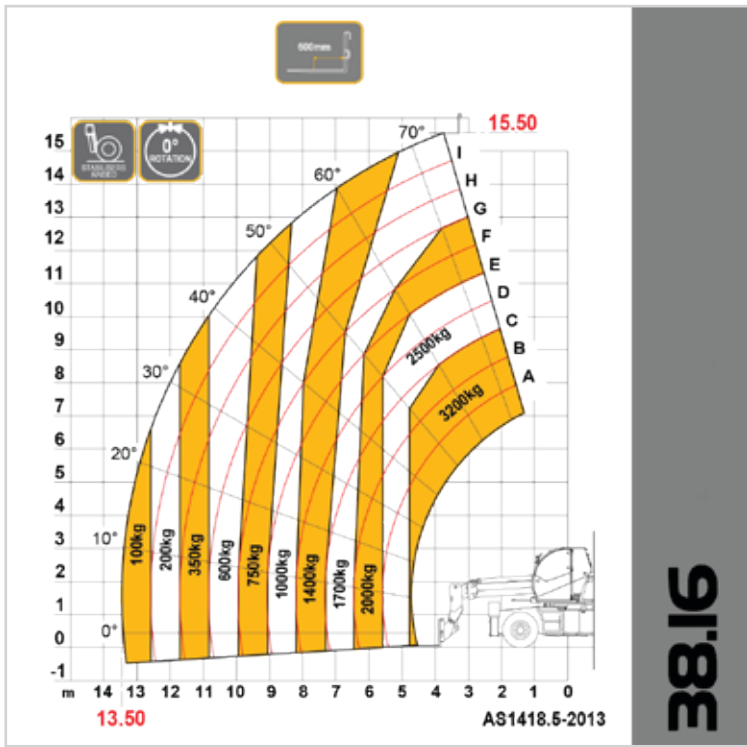

The  
Capital Equipment  
Specialists

Distributed by the AWD Group and their network of authorised dealers.  
AWD Group - 25 Garner Place, Ingleburn NSW 2565  
Tel. +61 2 8795 4555 - [www.dieci.com.au](http://www.dieci.com.au)  
[info@awdgrp.com.au](mailto:info@awdgrp.com.au)

Illustrations and photos show the standard international models and may or may not include optional equipment, accessories, customer installed or modified parts, optional parts and all standard equipment with some differences in colour and features. Machine specifications are subject to change without notice and additional load charts and machine or attachment specifications may be available on request. Please refer to the operators manual for correct machine and attachment operation.