

KANGA 5•6•7•8 SERIES COMPACT SKID STEER LOADERS

ATTACHMENTS



ADVANCED ENGINEERING TURNING HARD WORK INTO EASY BUSINESS

KANGA MULTI-TASK COMPACT SKID STEER LOADERS

BUCKETS


STANDARD BUCKET OK11641

0.1m³ Open shape helps prevent sticky materials from clogging. Volume sized to rated load capacity cannot be exceeded when brim filled with heavy materials, wet sand or gravel. Ideal for everyday use, shifting sand and soil, clean up and backfill.




4 IN 1 BUCKET OK60010

0.1m³ Enables front blading, back blading, plus all the advantages of a regular bucket. Open jaws to dump at full height. Use jaws for stump, post and tent peg pulling, lifting, placing rail road ties and rocks, broken tree limbs & broken concrete etc.



4 IN 1 BUCKET HEAVY DUTY OK60012

0.11m³ NORM, 8 Series loader only. Enables front blading, back blading, plus all the advantages of a regular bucket. Open jaws to dump at full height. Use jaws for stump, post and tent peg pulling, lifting, placing rail road ties and rocks, broken tree limbs & broken concrete etc.




MULCH BUCKET OK11613

0.16m³ For handling bulky, light materials such as bark chips, mulch and sawdust, quickly and easily. Straight cutting edge to scrape floors clean. Use in horse stables, stud farms and feed lots etc.



MANURE BUCKET OK65003

0.25m³ Designed for light material or manure, feed lots and poultry farmers. Individually controlled hydraulic wings easily reach under feed bins and inaccessible places.

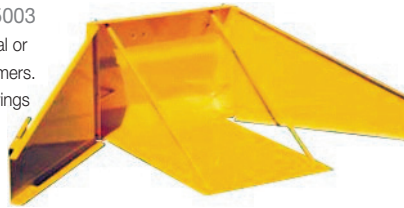

RUBBLE BUCKET OK50192


1200mm (48") Wide

Ideal for preparing difficult rocky soil for sod and turf. For removal of unwanted rocks and sticks, leaving soil behind. Makes light work of the most difficult site conditions.



GRAPPLE BUCKET OK50193

The Grapple attaches to Rubble Bucket. More effective when managing bushy tree limbs, straw, hay, etc. Hydraulically operated. Requires the Rubble Bucket (OK50192).



BROOMS

BUCKET BROOM OK50302

Clean up all manner of debris and leave your construction site clean. Self loading bucket, ideal for side walks, parking lots, factories, industrial sites and feed lots etc. Reverse rotation to push snow and gravel. Broom swings away automatically as bucket is emptied.



CATTLE YARD BROOM OK50306

For sweeping out "Sale Yard" cattle pens where progressively sweeping manure or debris to one side is required. Variable hydraulic tilt left to right ± 22 degrees. 1000mm (40") wide.



SNOW BROOM OK50150

Heavy duty, nylon bristle, road broom slides onto the backfill blade cutting edge to prevent ceramic tiles or feature side walks from damage from steel cutting edge. Wooden broom head extending past Backfill Blade minimises damage to walls from steel blade contact. Requires the Backfill Blade (OK85002).



POST HOLE • TREE PLANTING


STANDARD POWER HEAD OK30001

For hole diameters ranging from 150 - 450mm (6 - 18") Excellent for digging post holes. Maximum RPM 50. Easily digs to 1600mm deep (deeper with the extension L131610).



HI TORQUE POWER HEAD OK30311

High torque power for hole diameters ranging from 150 - 750mm (6 - 30") Excellent for post holes, tree planting & sign post foundations. Easily digs to 1600mm deep (deeper with the extension L131610).



HI TORQUE POWER HEAD OK30307

SIDE SHIFT

The high torque power head with the added ability to shift sideways to drill against walls, in corners and other such locations.



SUPER DIGGER LEGS OK50232

"Super Digger Legs" independently controlled hydraulic rear stabilisers allows you to "DOUBLE" your digging effort when augering. Ideal for stabilizing loader on uneven surfaces.



KANGA MULTI-TASK COMPACT SKID STEER LOADERS

POST HOLE • TREE PLANTING (cont'd)

MIXER BOWL OK50000

Convert Kanga into a mobile concrete mixer. No more hauling materials to the mixer or concrete to the job. Easily lifting and placing concrete over low walls or into post holes etc. Requires an Auger Power Head attachment (OK30001 or OK30311).



AUGER EXTENSION L131610

Fits between power head and auger to increase digging depth.



AUGERS

150mm (6")	L131020
200mm (8")	L131120
230mm (9")	L131220
250mm (10")	L131320
300mm (12")	L131430
350mm (14")	L131530
400mm (16")	L131550
450mm (18")	L131570
500mm (20")	L131580
600mm (24")	L131590
750mm (30")	L131600



Tungsten tip pilot and cutting edges for tree planting and sign post foundations up to 1400mm (55") deep. For deeper holes use extension L131610.

TRENCHERS

STANDARD TRENCHER OK41228

900mm (36") Bar, 150mm (6") Wide.

Side shift feature allows trenching up against walls for irrigation, sewerage, storm water, plumbing and under ground cables. Trencher chain consists of 70% Tungsten faced Rock teeth and 30% Earth teeth. Variable width available.



K.C.TRENCHER OK40002

900mm (36") Bar, 150-300mm (6-12") Wide

Heavy duty design and planetary transmission gets toughest trenching done. Using latest technology planetary drive sprocket is elevated up and away from dirt and spoil. Twin soil removing augers leave the trench sides clean. Trencher chain consists of 70% Tungsten-faced Rock teeth and 30% Earth teeth.



CRUMBER BAR L140080


Installs on Standard Trencher or KC Trencher.

Spring loaded parallelogram action keeps the crumber blade firmly on the trench floor leaving it free from loose soil & crumbs.



VIBRATING PLOUGH OK27000

For trenchless laying of irrigation pipes or cables up to 32mm (1 1/4") dia.



TRENCHERS (cont'd)

IRRIGATION PIPE LAYER

OK27004 Vibrating Plough


For trenchless laying of irrigation pipes with adjustable hose reel and turf cutter.



POLY PIPE LAYER OK50080

12 - 20mm (1/2" - 3/4") pipe or cable


Ideal for laying poly pipe or low voltage cable just under the ground surface quickly. Wheel blade cuts through the turf and the plough head leaves a neat channel. Pipe or cable is then fed directly into the ground via a hollow plough with minimal disturbance to the ground surface. Requires the Multi Tool Bar attachment (OK50061).



KANGA HOES

BACKHOE OK55004 6-7-8 series loaders only

For ultimate mini loader versatility digging up to 1.8m (70") deep. Features twin independent hydraulic stabilisers, for safer use on uneven ground. Unobstructed 360 degree view allows operator perfect vision of job site. For mature tree transplanting, drainage sewerage excavations, grave digging, installing/inspecting underground cables/pipes etc and general excavating. Multiple bucket widths.



MINI HOE OK55600


Low cost attachment ideal for shallow excavations. Multiple bucket widths.



HOE BUCKETS

150mm (6") Wide	OK55303
200mm (8") Wide	OK55300
300mm (12") Wide	OK55310
400mm (16") Wide	OK55320
600mm (24") Wide	OK55322

Providing a full range of widths for a variety of purposes.



LAWN & GARDEN CARE

ROCK GRAB OK55323

The rock grab a versatile tool capable of lifting large rocks and positioning them accurately in desired location. Three tynes provide a stable method for gripping rocks safely and firmly. Ideal for building rock walls.



TOWBAR OK50123

5-6-7 series loaders only

Use your Kanga Loader to manoeuvre caravans, trailers and boat trailers in the most confined parking lots, back yards or drive ways. Allows a zero turning radius for most trailers. 5-6-7 series loaders only.



KANGA MULTI-TASK COMPACT SKID STEER LOADERS

LAWN & GARDEN CARE (cont'd)

LAWN AERATOR OK50402
For aerating or coring lawns for improved growth and lawn quality. 1000mm (40") wide.




SLASHER OK95002
Heavy duty construction. Ideal for clearing lifestyle lots, scrub and overgrown land. Fuel and battery power supplied from the Kanga via a quick connect umbilical. Cutting discharge rear only.



ROTATING LOG GRAB OK50600
The Rotating Log Grab is an effective way of moving and manipulating large logs and other similar objects. The Log Grab consists of 3 tynes, capable of gripping any shape, attached to a rotating disc capable of 180° rotation.



TURF CUTTER OK50173
With only one moving part (front roller) is virtually maintenance free. The front roller provides stability to set required cutting depth ensuring easy effortless control for removing old turf, transplanting sod, removing turf prior to trenching and replacing it when trenching is completed. 300mm (12") wide.



CARRYALL LEVELLER OK50071
1225mm (49") Wide
For transporting bulky items, paving tiles, cement bags, nursery plants, sod, turf and fence palings. Ideal for preparing top soil for sod or turf laying and levelling bedding sand for pavers.



HYDRAULIC ANGLE BLADE OK85002 1200mm (48") Wide
Backfill Blade ideal for backfilling trenches, pushing loose soil, feed lot clean-out. Fingertip hydraulic controlled side shift tilts blade from left to right.



ROTARY TILLER OK80003
1000mm (40") Wide
Heavy duty tiller turns the toughest ground into beautiful garden bed, sod and turf bed preparation. Cutting depth 150mm (6") deep



BORERS

UNDER ROAD BORER POWER HEAD OK50094
Horizontal power head drops below ground level for under road boring or reaming. Eliminates pavement removal for pipe and cable laying.



UNDER ROAD BORERS
65mm (2.5") diam, 1500mm (60") Long L132150
80mm (3") diam, 1500mm (60") Long L132200
Horizontal auger for boring under pavement or driveways for pipes or electrical cable without disturbing original pavement. Augers stack together for boring longer holes. Joiner and D-clip available.

UNDER ROAD BORER PILOT AUGER
80mm (3") Diam. L132180
Removable unit to allow stacking of augers for longer holes. to suit 65mm (2.5") and 80mm (3") Augers.
90mm (3.5") Wide Suit 80mm (3") Auger L132190
Removable unit to allow stacking of augers for longer holes. To suit 80mm (3") Augers.

JOINER L132160
1-1/8" Hex Allows stacking of augers for longer holes.
"D" CLIP L132170
1-1/8" Hex Allows stacking of augers for longer holes.



ROD & REAMER KIT L131990
Horizontal Rod and Reamer for under road boring. SPECIAL ORDER.




TREE CARE

TERMINATOR STUMP GRINDER OK70003 24 hp Honda. For professional tree care people and land care maintenance. Direct drive 24hp Honda engine provides ample power. Umbilical controls fit to Kanga's operating console. Easy to use hydraulic slew and cutting depth controls.



HYDRAULIC STUMP GRINDER OK74503 Smaller hydraulic powered unit for lighter applications. Easy to use hydraulic slew and cutting depth controls.



LOG SPLITTER OK75002
Kanga's Log Splitter with high pressure hydraulics the right combination for splitting the toughest of logs. Finger tip hydraulic controls with auto re-set ensure quick and simple operation.



KANGA MULTI-TASK COMPACT SKID STEER LOADERS

MULTI-TOOLS

MULTITool BAR TOOL CARRIER OK50061

For use with rippers, poly pipe layer, tow hitch, forks etc.



TOW HITCH OK50120

Use your Kanga Loader to manoeuvre caravans, trailers and boat trailers in the most confined parking lots, back yards or drive ways. Allows a zero turning radius for most trailers. Requires the Multi Tool Bar attachment (OK50061).



RIPPER

- 1 Blade OK50051
- 2 Blade OK50050
- 3 Blade OK50013 (Removable tips for easy maintenance).

Attached to the Multi Tool Bar, the Ripper is the ideal tool for breaking up hard rocky ground for garden beds, or shallow excavations for concrete pavements etc. Requires the Multi Tool Bar attachment (OK50061).



FORKS

- 750mm (30") Long Tynes OK50033
- 900mm (36"), FOR 8 SERIES ONLY OK50031

Quick attach system has forks in place in seconds. Ideal for lifting and transporting all manner of materials, including fence posts, palings, rail road ties, mature tree root balls and more. Requires the Multi Tool Bar attachment (OK50061).



SPECIALIST

VINYL STRIPPER OK50212

150 - 300mm (6" - 12") The Kanga Vinyl Stripper powers effortlessly through lino and vinyl tiles leaving a clean floor ready for relaying. Kanga's dexterity and speed make easy work of negotiating corridors, show rooms and reception areas. Ideal for use when re-flooring supermarkets, shopping centres, schools and hospitals etc. Features a replaceable, self-sharpening reversible blade.



DRUM HANDLER OK25001

6-7-8 Series loaders only
For handling 205L (44gal) drums during loading and unloading.
6-7-8 Series loaders only



ROCK BREAKER OK87111

Rammer In 9 Rock Breaker ideal for breaking up pavement, sidewalks, driveways. Ideal for internal and external demolition. Must be used with Hydraulic oil cooler for extended periods of use. Eliminates Hand Arm Vibration (H.A.V.)



SPECIALIST (cont'd)

CONCRETE GRINDER OK88000

Schibeci.

The Schibeci Poly planer is an aggressive removal tool designed to cut, level or polish. Ideal for use on concrete pavement, factory floors, thermoplastic tiles, epoxy & resins, plastics, rumble strips, plastic and ceramic road reflectors, exposed aggregate finish on concrete, steps in asphalt, yellow and white lines, timbers, mortars, and stencilled concrete.



DUMP BIN OK50260

Ideal for collection of on site demolition trash and scrap before being transferred into a larger skip bin. The dump bin is on lockable wheels for easy manoeuvring by hand with a hinged side is easily emptied at height.



BLOCK GRAB OK28000

The block grab ideal for moving up to 6 mud bricks at once quickly, easily and neatly. Also allows for moved blocks to be placed straight into stacks. Allows for easy on site transport and placing of bricks.




RAMMER POST DRIVER OK29500

Purpose designed for driving road side guide rail posts into the ground and ideal for all types of post driving and earthing rod drilling. Also converts to rock drill mast.



KERB LIFTER OK50750

Specifically designed to lift gutter or kerb sections and place in correct position. The Kerb Lifter is also ideal for lifting other similar shaped objects in a variety of materials. Eliminates hand labour stress.




SNOW BLOWER OK78000

Two stage snow blower with variable angle and elevation.



DEBRIS PULLER OK50015

Debris Puller's adjustable reach and size makes it easy to remove rubbish from difficult to access areas. Clean under conveyer belts and low head height areas.

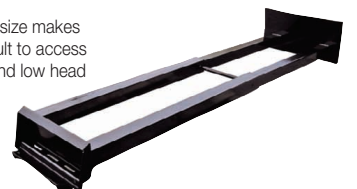

KANGA MULTI-TASK COMPACT SKID STEER LOADERS

BUCKETS						
STANDARD BUCKET	OK11641	Volume 0.1m ³ /3.5ft ³	Width 1050mm/41"	Length 630mm/25"	Height 400mm/16"	Weight 50kg/110lbs
4 IN 1 BUCKET	OK60010	Volume 0.1m ³ /3.5ft ³	Width 1050mm/41"	Length 680mm/27"	Height 565mm/22"	Weight 130kg/287lbs
4 IN 1 BUCKET HEAVY DUTY	OK60012	Volume 0.11m ³ /3.9ft ³	Width 1100mm/43"	Weight 157kg/346lbs		
MULCH BUCKET	OK11613	Volume 0.16m ³ /5.7ft ³	Width 1050mm/41"	Weight 59kg/130lbs		
MANURE BUCKET	OK65003	Volume 0.25m ³ /8.8ft ³	Width 1060mm/41"	Length 1140mm/42"	Wing Opening 90° both sides	Weight 130kg/287lbs
RUBBLE BUCKET	OK50192	Width 1200mm/47"	Length 710mm/28"	Tyre Length 550mm/22"	Tyre Spacing 60mm/2.4"	Weight 91kg/201lbs
GRAPPLE BUCKET	OK50193	Width 1200mm/47"	Tyre Length 550mm/22"	Tyre Spacing 60mm/2.4"	Weight 118kg/260lbs	
BROOMS						
BUCKET BROOM	OK50302	Volume 0.08m ³ /2.8ft ³	Length 860mm/34"	Brush Diameter 400mm/16"	Brush Width 790mm/31"	Weight 110kg/234lbs
CATTLE YARD BROOM	OK50306	Brush Width 1000mm/40"	Brush Diameter 400mm/16"	Slew Angle ±22° left through right		Weight 205kg/452lbs
SNOW BROOM	OK50150	Width 1170mm/46"			Weight 5kg/11lbs	
POST HOLE • TREE-PLANTING						
STANDARD POWER HEAD	OK30001	Torque 1320Nm/975ft lbs	Variable Speed 0 - 50rpm	Fwd - Reverse Fingertip controls	Weight 53kg/117lbs	
HI TORQUE POWER HEAD	OK30311	Torque 2300Nm/1700ft lbs	Variable Speed 0 - 40rpm	Fwd - Reverse Fingertip controls	Weight 69kg/152lbs	
HIGH TORQUE POWER HEAD Side Shift	OK30307	Torque 2300Nm/1700ft lbs	Variable Speed 0 - 40rpm	Fwd - Reverse Fingertip controls	Weight 127kg/280lbs	
SUPER DIGGER LEGS	OK50232	Height 860mm/34"	Lifting Capacity 715kg/1576lbs per leg	Lift Height 300mm/12"	Weight 62kg/134lbs	
MIXER BOWL	OK50000	Volume 0.064m ³ /2.2ft ³	Length 650mm/26"	Diameter 600mm/24"	Fwd - Reverse Fingertip controls	Weight empty 18kg/40lbs
AUGER EXTENSION	L131610	Length 495mm/20"			Weight 9kg/20lbs	
AUGERS	L131020	Diameter 150mm/6"	Length 1070mm/42"		Weight 12kg/26lbs	
	L131120	200mm/8"	1070mm/42"		14kg/31lbs	
	L131220	230mm/9"	1070mm/42"		18kg/40lbs	
	L131320	250mm/10"	1070mm/42"		19kg/42lbs	
	L131430	300mm/12"	1070mm/42"		25kg/55lbs	
	L131530	350mm/14"	1070mm/42"		26kg/57lbs	
	L131550	400mm/16"	1070mm/42"		33kg/73lbs	
	L131570	450mm/18"	1070mm/42"		38kg/84lbs	
	L131580	500mm/20"	890mm/35"		40kg/88lbs	
	L131590	600mm/24"	970mm/38"		49kg/108lbs	
L131600	750mm/30"	970mm/38"		58kg/128lbs		
TRENCHERS						
STANDARD TRENCHER	OK41228	Dig Depth 900mm/36"	Cutting width 150mm/6"	Optional cutting width 100mm/4" - 200mm/8"		Weight 172kg/380lbs
K.C.TRENCHER	OK40002	Dig Depth 900mm/36"	Cutting width 150mm/6"	Optional cutting width 100mm/4" - 300mm/12"		Weight 187kg/412lbs
CRUMBER BAR	L140080					Weight 15kg/33lbs
VIBRATING PLOUGH	OK27000	Length 700mm/28"	Dig Depth 150mm/6"	Pipe Diam. 32mm/1¼"	Weight 81kg/179lbs	
IRRIGATION PIPE LAYER	OK27004	Length 1400mm/56"	Dig Depth 150mm/6"	Pipe diameter Pipe size variable depending on adaptor		Weight 200kg/441lbs
POLY PIPE LAYER	OK50080	Pipe diameter 12mm(1/2") - 20mm(3/4")				Weight 15kg/33lbs

KANGA HOES							
BACKHOE 6-7-8 Series Loaders Only	OK55004	Dig Depth 1800mm/70"	Bucket width 150mm/6" - 600mm/24"	Bucket Reach 2665mm/105"	Breakout Force 800kg/1760lbs	Weight 380kg/337lbs	
		Slew Force 335kg/736lbs	Lifting Capacity 190kg/420lbs	Slew Width 4000mm/157"	Controls Joystick	Stabilisers Independent hydraulic x 2	
MINI HOE	OK55600	Bucket width 150mm/6" - 300mm/12"		Breakout Force 800kg/1760lbs		Weight 40kg/88lbs	
HOE BUCKETS	OK55303	Width 150mm/6"			Weight 14kg/31lbs		
	OK55300	200mm/8"			16kg/35lbs		
	OK55310	300mm/12"			19kg/42lbs		
	OK55320	400mm/16"			23kg/51lbs		
	OK55322	600mm/24"			29kg/64lbs		
LAWN & GARDEN CARE							
ROCK GRAB	OK55323	Rock diameter 160mm/6.3" - 500mm/20"	Length 575mm/23"	Tyre Length 400mm/16"	Lifting Capacity 180kg/400lbs	Weight 85kg/188lbs	
TOWBAR	OK50123	Tow ball diameter 50mm/2" - 58mm/2¼"		Lifting Capacity 250kg (draw bar load)		Weight 12kg/27lbs	
LAWN AERATOR	OK50402	Width 1000mm/40"		Dig Depth 80mm/3"		Weight 92kg/203lbs	
SLASHER	OK95002	Cutting width 1200mm/47"	Cutting heads 480mm/18" x 3	Engine 16HP electric start	Centrifugal Clutch Twin vee belt drive	Weight 227kg/500lbs	
ROTATING LOG GRAB	OK50600	Max log weight 120kg/265lbs				Weight 148kg/326lbs	
TURF CUTTER	OK50173	Cutting width 300mm/12"		Weight 128kg/282lbs			
CARRYALL LEVELLER	OK50071	Width 1225mm/49"		Tyre Length 720mm/28"		Weight 46kg/102lbs	
HYDRAULIC ANGLE BLADE	OK85002	Width 1200mm/48"		Weight 75kg/166lbs			
ROTARY TILLER	OK80003	Cutting width 1000mm/39"	Cutting depth 150mm/6"	Fwd - Rev Fingertip controls		Weight 155kg/341lbs	
BORERS							
UNDER ROAD BORER POWER HEAD	OK50094	Torque 900Nm/665ft lbs	Variable Speed 0 - 80rpm	Fwd - Reverse Fingertip controls		Weight 46kg/101lbs	
Standard accessories – Uncoupling tool / Swivel Shank / Drill rod guide							
UNDER ROAD BORERS	L132150	Diameter 65mm/2.5"		Length 1500mm/59"		Weight 12kg/27lbs	
	L132200	80mm/3"		1500mm/59"		14kg/31lbs	
UNDER ROAD BORER PILOT AUGER	L132180	Diameter 80mm/3"		Weight 1kg/2.2lbs			
	L132190	90mm/3.5"		1kg/2.2lbs			
JOINER 1-1/8" Hex	L132160					Weight 0.8kg/1.75lbs	
"D" CLIP 1-1/8"	L132170					Weight 0.006kg/0.01lbs	
ROD AND REAMER KIT	L131990	Special Order					
TREE CARE							
TERMINATOR STUMP GRINDER	OK70003	Blade diameter 380mm/15"	Teeth 4 pairs	Weight aux fuel tank 9kg/20lbs	Engine 24HP	Variable Tilt 90°	Weight grinder 246kg/543lbs
HYDRAULIC STUMP GRINDER	OK74503	Blade diameter 380mm/15"	Teeth 4 pairs	Slew Angle ±50°		Variable Tilt 90°	Weight 146kg/322lbs
LOG SPLITTER	OK75002	Jaw Opening 600mm/24"	Splitting force 1700kg/3750lbs	Safety controls Requires operator to split log. Auto reset		Weight 225kg/495lbs	
MULTI-TOOLS							
MULTITOOL BAR TOOL CARRIER	OK50061	Width 900mm/36"		Carry width up to 860mm/34"		Weight 39kg/86lbs	
TOW HITCH	OK50120	Tow ball diameter 50mm/2" - 58mm/2.25"		Lifting Capacity 250kg (draw bar load)		Weight 6kg/13lbs	
RIPPER 1 BLADE 2 BLADE 3 BLADE	OK50051	Width 435mm/17"	Dig Depth 180mm/7"	Ripper tynes High tensile steel x 1 High tensile steel x 2 High tensile steel x 3 with replaceable tips		Weight 9kg/20lbs	
	OK50050	435mm/17"	180mm/7"			12kg/26lbs	
	OK50013	460mm/18"	180mm/7"			15kg/33lbs	
FORKS	OK50033	Carry width up to 860mm/34"	Tyre Length 900mm/36"	Lifting Capacity 250kg/550lbs	Lift Height 1700mm/67"	Weight 15kg/33lbs (ea)	
	OK50031	up to 860mm/34"	900mm/36"	250kg/550lbs	1700mm/67"	16kg/35lbs (ea)	

KANGA MULTI-TASK COMPACT SKID STEER LOADERS

SPECIALIST						
VINYL STRIPPER	OK50212	Width 650mm/26"		Operating width 150mm/6" - 300mm/12"		Weight 394kg/869lbs
DRUM HANDLER 6-7-8 Series only	OK25001	Drum diameter up to 572mm/21.5" (std 44gal)		Lifting Capacity 225kg/500lbs		Weight 60kg/132lbs
ROCK BREAKER Rammer In 9	OK87111	Tool base diameter 119mm/4.7"		Impact Frequency 400 - 2100bpm		Weight 110kg/243lbs
CONCRETE GRINDER Schibeci	OK88000	Grind width 250mm/10"	Grind depth up to 10mm(3/8")	Tolerance ±0.5mm(1/50")		Weight 420kg/926lbs
DUMP BIN	OK50260	Volume 0.3m³/10.6ft³	Width 1300mm/51"	Height 635mm/25"	Lifting Capacity 180kg/400lbs	Weight 88kg/194lbs
BLOCK GRAB	OK28000	Width 1300mm/51"	Length 630mm/25"	Lifting Capacity 170kg/375kg		Weight 99kg/218lbs
RAMCO POST DRIVER	OK29500	Operation length 2600mm/102"	Impact frequency 540 - 1740 bpm	Pulling force 4000kg/820lbs		Weight 390kg/860lbs
KERB LIFTER	OK50750	Jaw Opening 70mm (2 3/4") - 355mm (14")				Weight 58kg/128lbs
SNOW BLOWER	OK78000	Width 1200mm/47"			Weight 82kg/180lbs	
DEBRIS PULLER	OK50015	Width 780mm/31"	Length 1700mm/67" 2960mm/117"	Height 400mm/16"		Weight 95kg/210lbs

CHANGE THEM FAST!

Changing attachments takes time... and time is money. There's less downtime with Kanga attachments because all of them feature the Kanga-designed **universal quick hitch** to make attachment changes easy and in only one or two minutes.



Other attachments available include (not featured in this brochure)

OK30013	Auger Swivel Joint
OK41231	Pole Inspection Trencher
OK85006	6 Way Hyd. Angle Blade
OK28500	Harley Rake
OK29000	Wood chipper
OK50161	Jib
OK50270	Kiln Kart Push Puller
OK87112	Tile Lifter Piccolo
OK50041	Mounting Plate

New universal attachments are constantly being added to the range.

Please check with your Kanga dealer or visit our website for information, updates and availability. Many universal attachments from other manufacturers can also be fitted to the Kanga 5,6,7 & 8 series.



ADVANCED ENGINEERING TURNING HARD WORK INTO EASY BUSINESS

Australian designed, Australian made, Australian owned. For detailed attachment specifications, visit www.kanga-loader.com

For further information or details of your nearest Kanga dealer – Phone **1800 243 643** or email: sales@kanga-loader.com

AUSTRALIA Brisbane • Gold Coast • Sydney • Canberra • Melbourne • Adelaide • Perth | NEW ZEALAND | UNITED KINGDOM | USA | SOUTH AFRICA